



HP Pavilion dv7-1285dx Back Plate Replacement

This guide will provide instructions for a user to remove the device back plate, which allows the user access to many other device parts.

Written By: Chris Apple



INTRODUCTION

The guide will show you how to remove the device back plate.



TOOLS:


- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Ensure the device is powered down and unplugged.
- Turn the device upside down with the battery compartment facing you.
- Slide the black slider to the right and lift the battery out of its compartment.

Step 2 — Back Plate

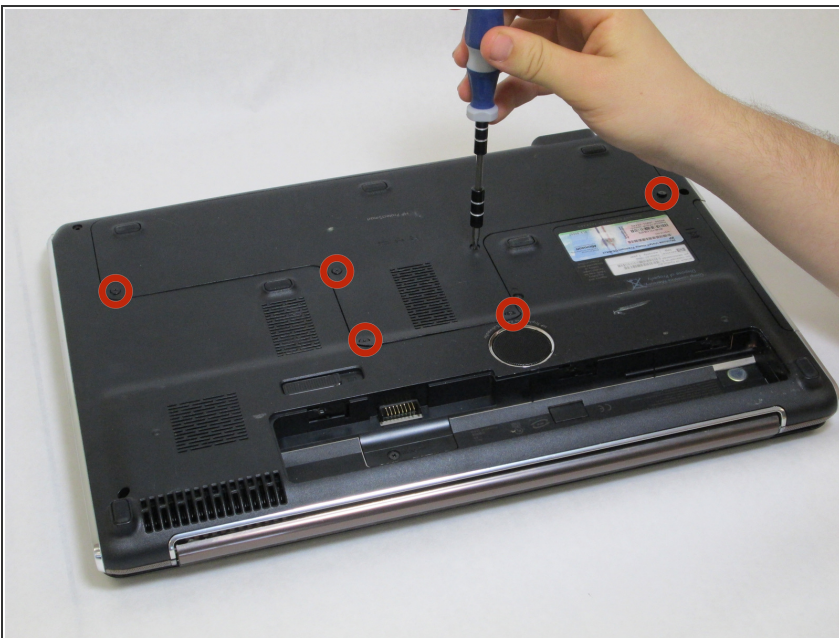

- Locate and remove the six Phillips PM2.5×7.0 screws around the perimeter of the back plate.
- ⓘ These screws do not completely detach from the device when unscrewed.

Step 3



- Use the plastic opening tool to lift up the back plate and set it aside.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 04:25:30 AM.